



□□□□□□□□□□□□

□□	□□□□□
□□□□	□□□□□□□□□□PVA□□□□□□□□
□□□□□	□□□□□
□□	□□□□□
□□□□	□□□□□□□□□□
□□	□□□□□□□□□□
□□□□	30gsm□45gsm□□□□□□□□□□
□□	1000mm×300mm□□□□□□□□
□□	1.□□□□□□□□□□□□□□□□□□□□ 2.□□□□□□□□□□□□ □□□□□□□□
□□	□□□□□□□□□□□□□□□□□□□□


□□□□□□□□□□□□

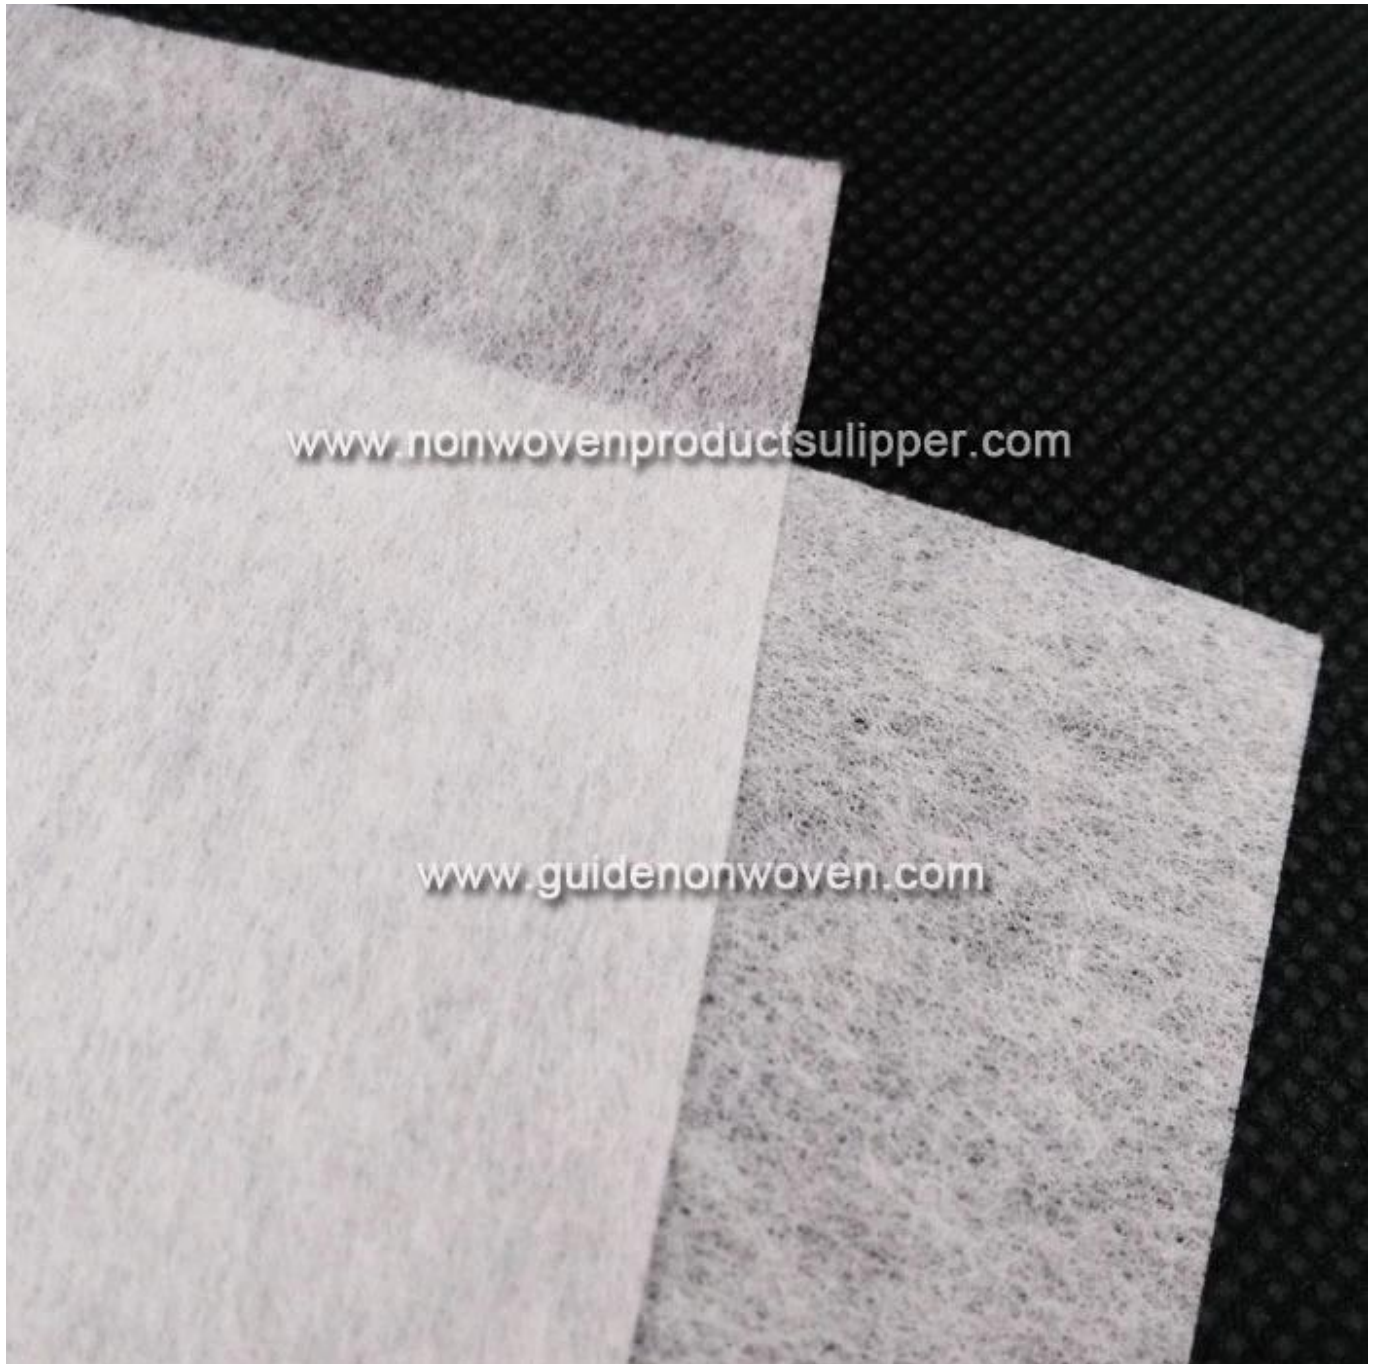

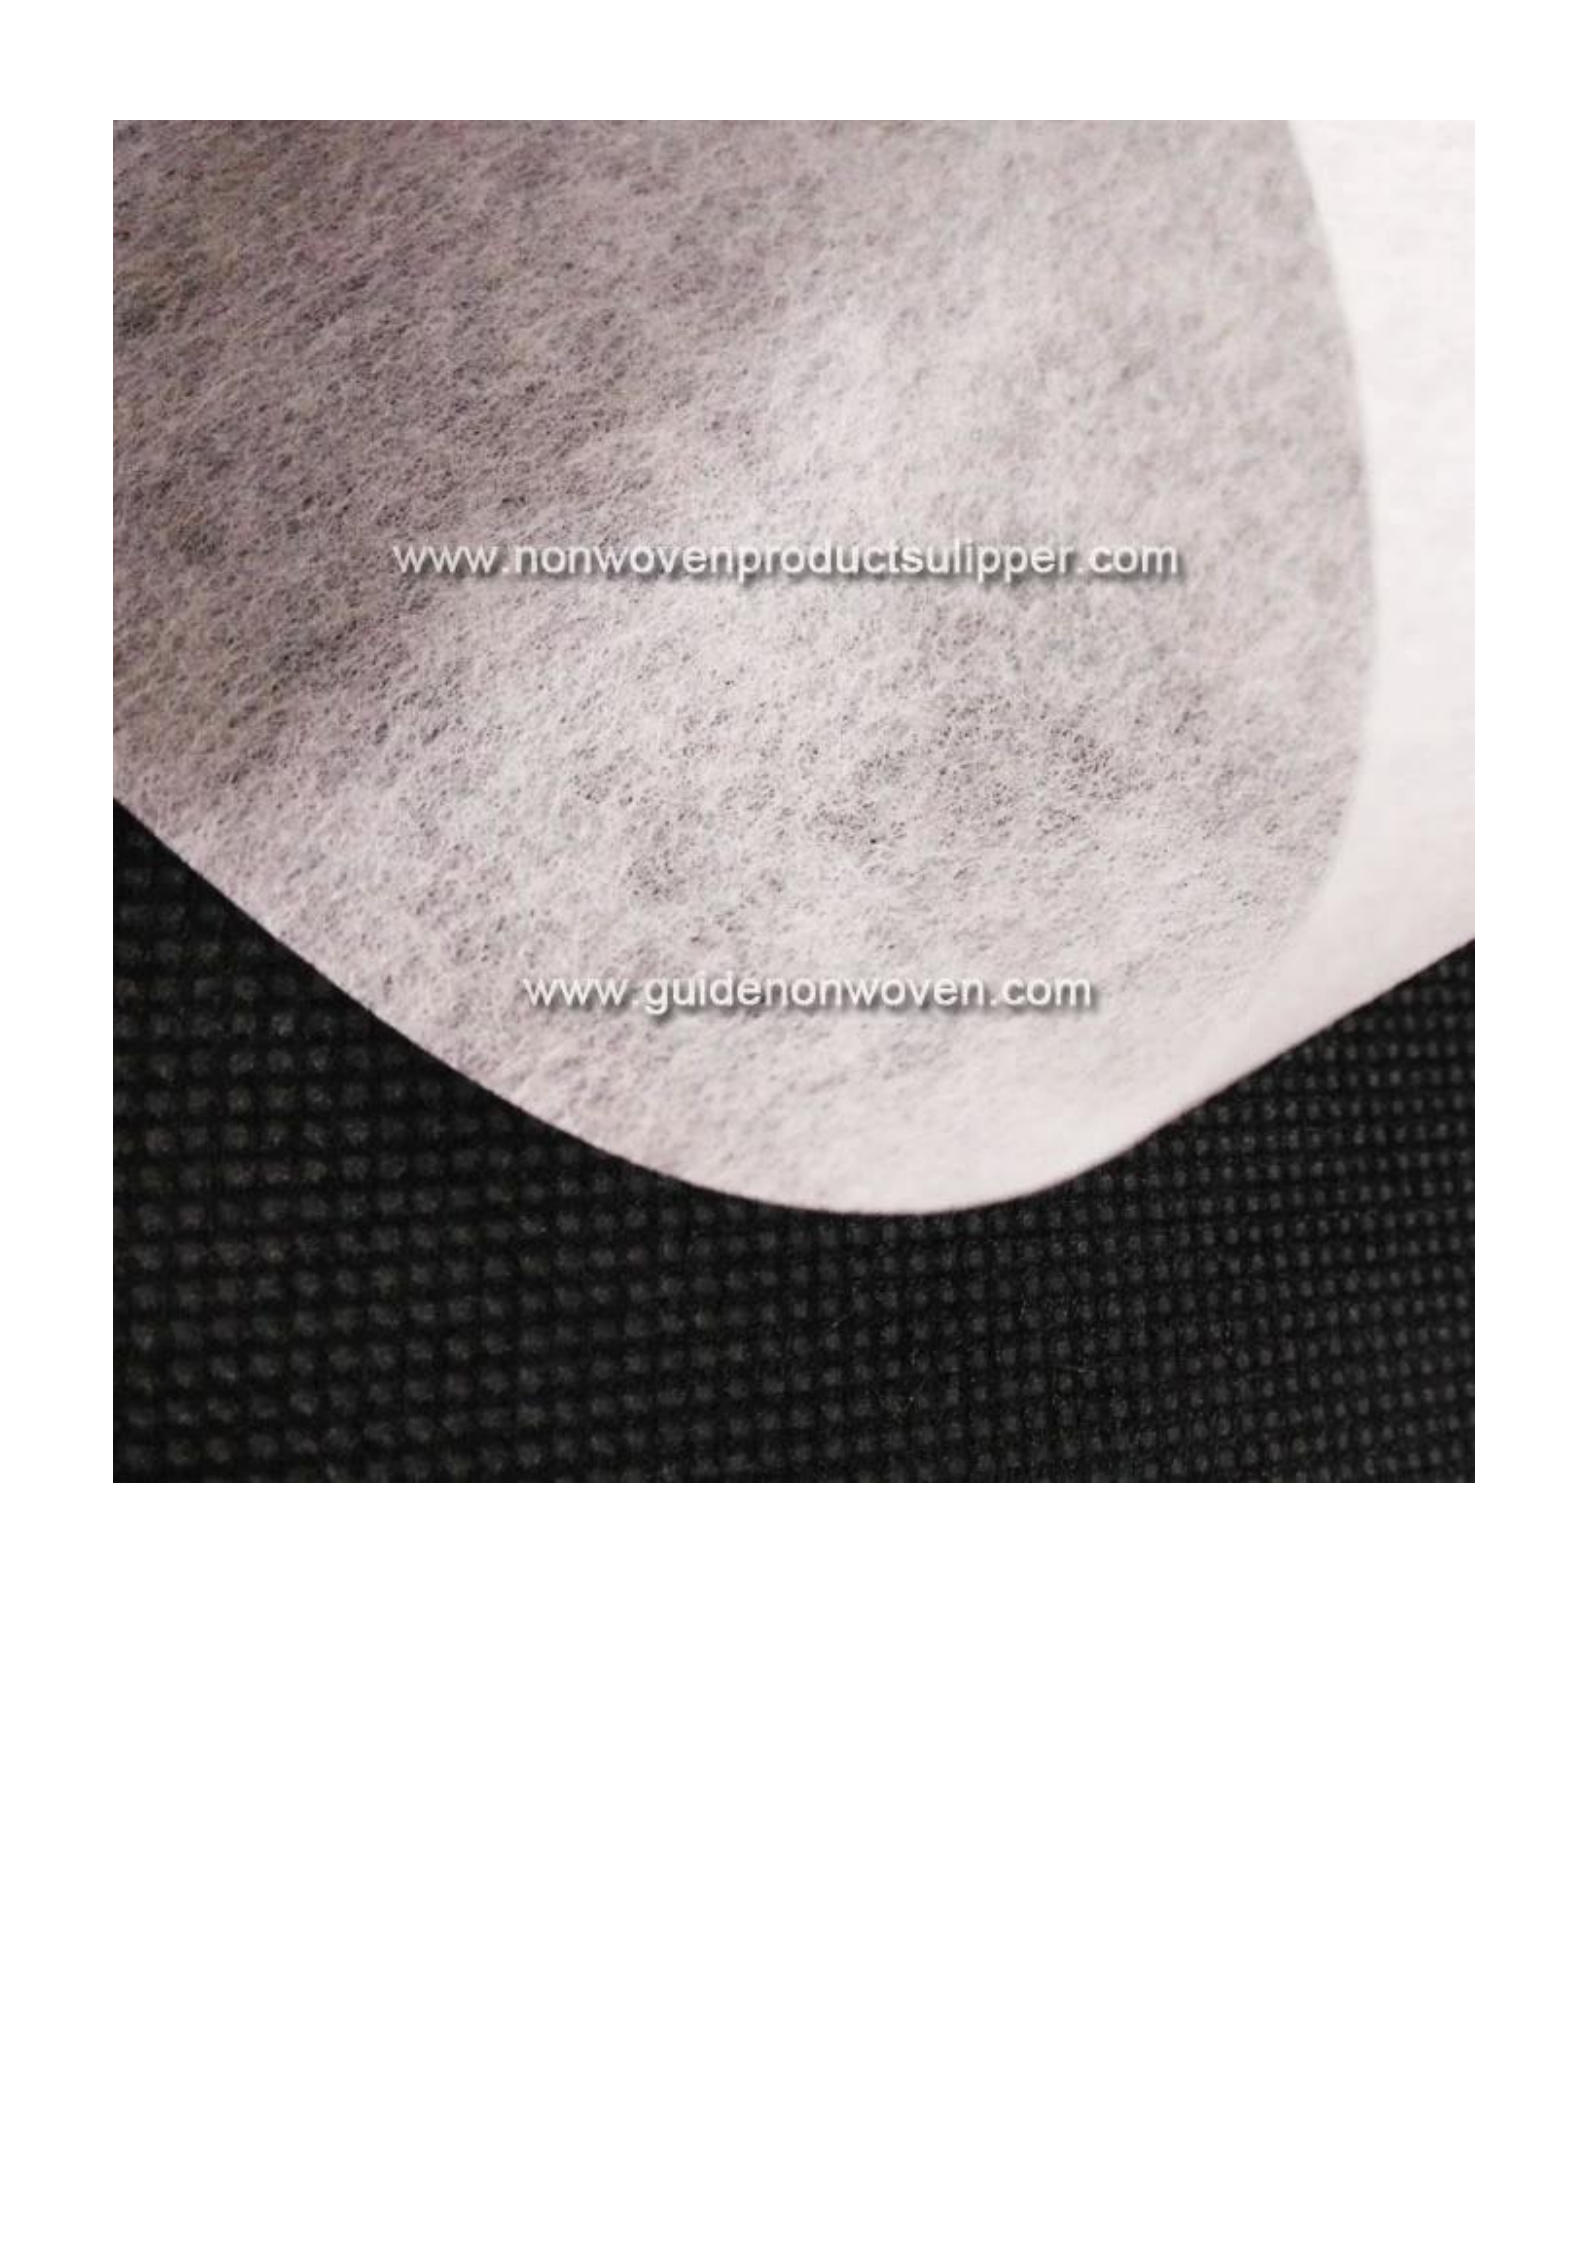

www.nonwovenproductsulipper.com

www.guidenonwoven.com



www.nonwovenproductsulipper.com

www.guidenonwoven.com



www.nonwovenproductsulipper.com

www.guidenonwoven.com

□□□□□□□□□□□□□□□□□□



Packed in rolls,
with 2 " or 3 "
core inside,
strong poly
bags outside



transporting the goods
to the port



loaded in container

Q1 Q2 Q3 Q4 Q5 Q6 Q7

Q1	A1
Q2	A2 1ton
Q3	A3
Q4	A4
Q5	A5
Q6	A6 3-6
Q7	A7 OEM

Q8

A8 24