

0000LB15000025 gsm000000SMS000

00	LB15000025 gsm000000SMS000
000	000
00000	00+00+000SMS
00	0000
00000	000
00	LB15
0000	3.2M000000000
00	- 000 - 00000 - 000000000000000000 - 0000000000 000000
00	00/0000000000 000000


00	00	00	00
00	GSM	24.56	ASTM D3776
MD0000	N /500	70.03	ASTM D5035-95
CD0000	N /500	30.37	ASTM D5035-95
MD00		87.7	ASTM D5035-95
CD00		88.8	ASTM D5035-95
000	0002Ø	31.1	IST 80.6
000	L / ² ·S	475.13	ASTM D737-75

0000LB15000025/000000000SMS000



www.nonwovenproductsulipper.com

www.guidenonwoven.com

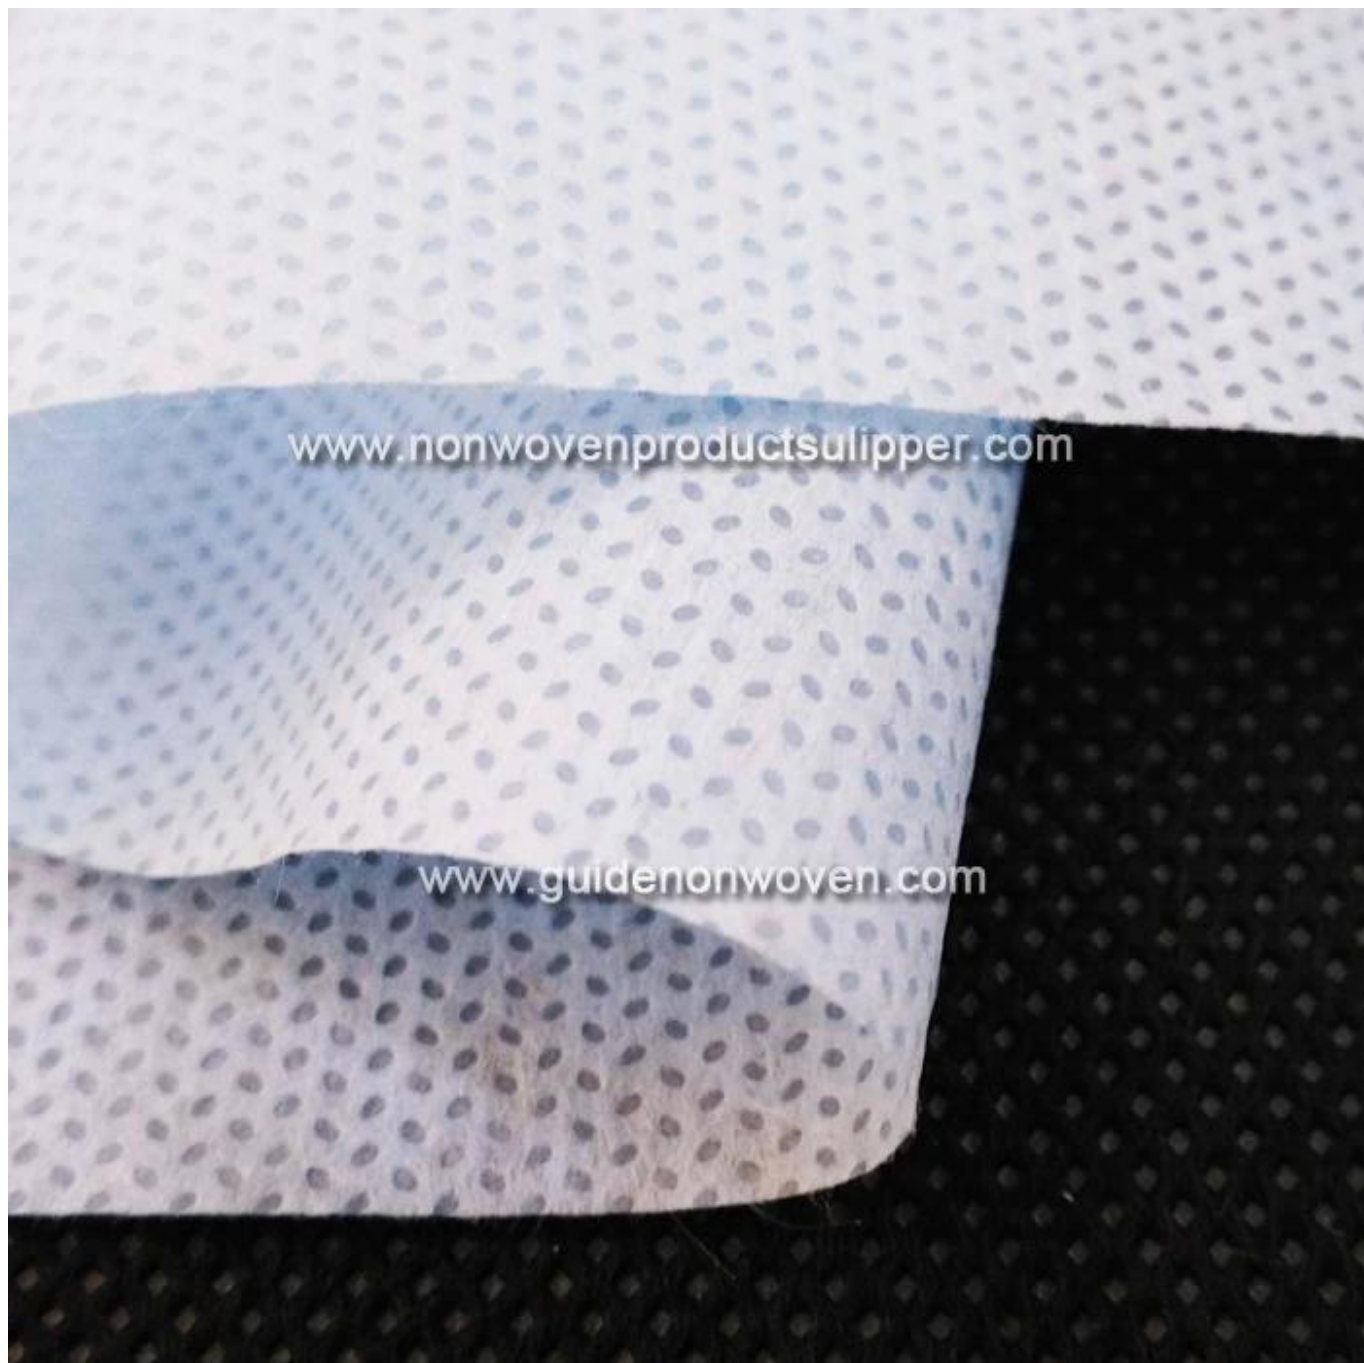

LB15 25 gsm SMS



Packed in rolls,
with 2 " or 3 "
core inside,
strong poly
bags outside



transporting the goods
to the port



loaded in container

[illegible]

