

LY225 gsmSMS


|  |                  |
|--|------------------|
|  | LY225 gsmSMS     |
|  |                  |
|  | +SMS             |
|  |                  |
|  |                  |
|  | LY2              |
|  | 3.2M             |
|  | -<br>-<br>-<br>- |
|  | /                |

|    |      |       |               |
|----|------|-------|---------------|
|    |      |       |               |
|    | GSM  | 24.06 | ASTM D3776    |
| MD | N /5 | 59.57 | ASTM D5035-95 |
| CD | N /5 | 26.77 | ASTM D5035-95 |
| MD |      | 81.77 | ASTM D5035-95 |
| CD |      | 70.37 | ASTM D5035-95 |
|    | 2Ø   | 31    | IST 80.6      |
|    | G    | 0.91  | AATCC 42      |

LY225 gsmSMS

[www.nonwovenproductsulipper.com](http://www.nonwovenproductsulipper.com)

[www.guidenonwoven.com](http://www.guidenonwoven.com)

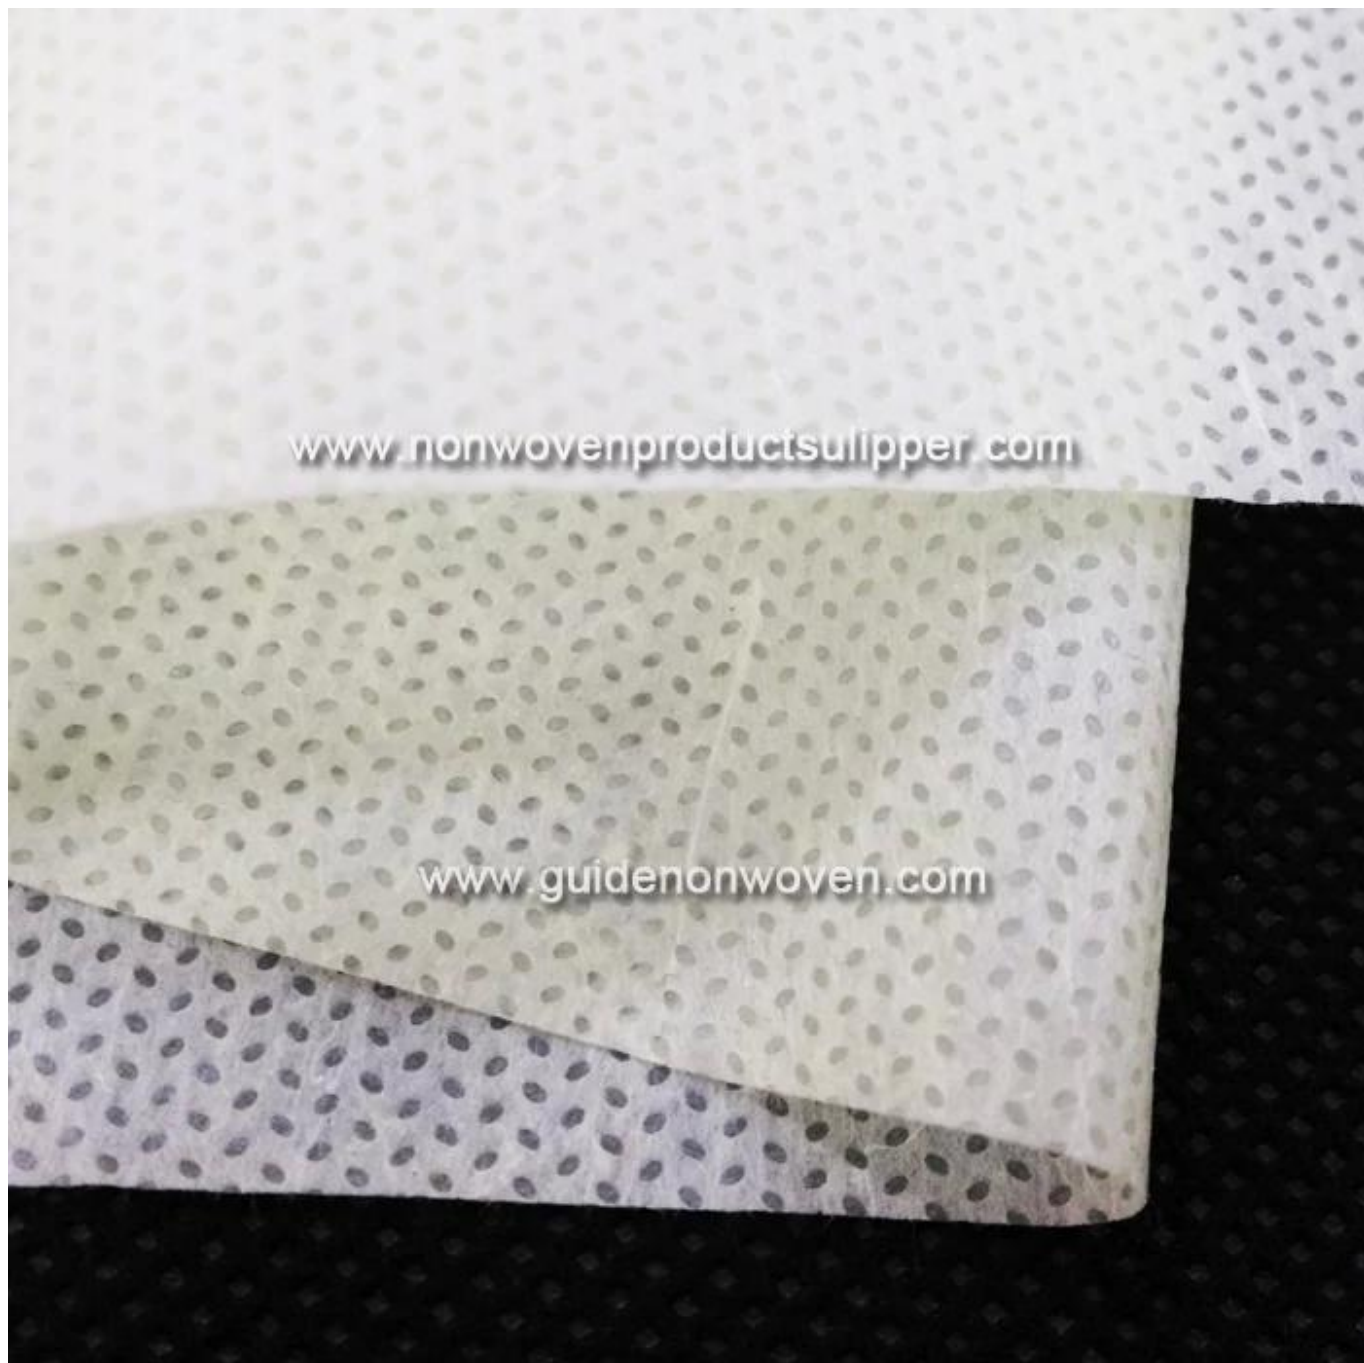

LY2 25 gsm SMS



Packed in rolls,  
with 2 " or 3 "  
core inside,  
strong poly  
bags outside



transporting the goods  
to the port



loaded in container

LY2 25 gsm SMS

|    |    |
|----|----|
|    |    |
|    | A1 |
|    | A2 |
|    | A3 |
|    | A4 |
| Q5 | A5 |
| Q6 | A6 |
| Q7 | A7 |
| Q8 | A8 |

