


WH1 45 gsm SMS

|                |  |
|----------------|--|
| WH1 45 gsm SMS |  |
|                |  |
|                |  |
|                |  |
|                |  |
|                | WH1  |
|                | 3.2M   |
|                | <ul style="list-style-type: none"> <li>-</li> <li>-</li> <li>-</li> <li>-</li> </ul> |
|                |  |


|    | GSM                 | 45.04  | ASTM D3776    |
|----|---------------------|--------|---------------|
| MD | N /5                | 109.43 | ASTM D5035-95 |
| CD | N /5                | 54.43  | ASTM D5035-95 |
| MD |                     | 113.07 | ASTM D5035-95 |
| CD |                     | 85.83  | ASTM D5035-95 |
|    | 2Ø                  | 53     | IST 80.6      |
|    | L / <sup>2</sup> -S | 195.99 | ASTM D737-75  |

WH1 45 gsm SMS



[www.nonwovenproductsulipper.com](http://www.nonwovenproductsulipper.com)

[www.guidenonwoven.com](http://www.guidenonwoven.com)

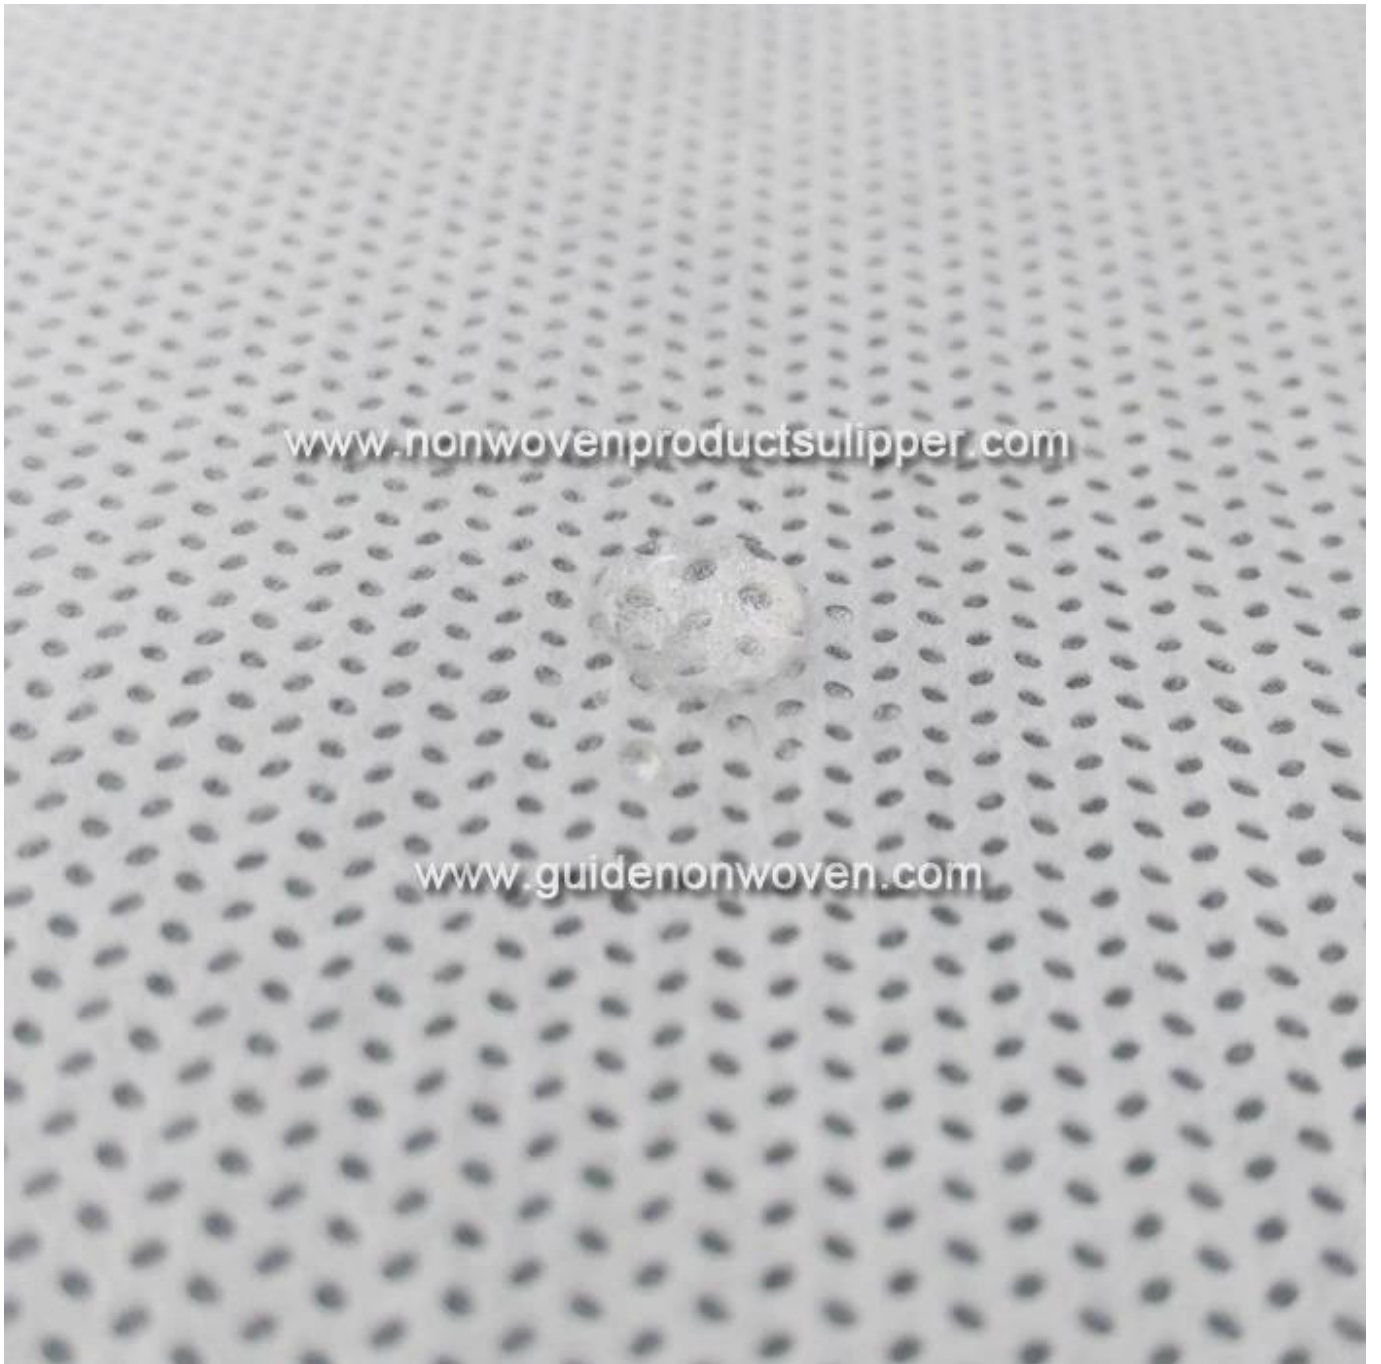

[www.nonwovenproductsulipper.com](http://www.nonwovenproductsulipper.com)

[www.guidenonwoven.com](http://www.guidenonwoven.com)

WH1 45 gsm SMS



Packed in rolls,  
with 2 " or 3 "  
core inside,  
strong poly  
bags outside



transporting the goods  
to the port



loaded in container

WH1 45 gsm SMS

|    |    |
|----|----|
| Q1 | A1 |
| Q2 | A2 |
| Q3 | A3 |
| Q4 | A4 |
| Q5 | A5 |
| Q6 | A6 |
| Q7 | A7 |

8

A8 24