

□□□□ □□□□□□60□□□□□40□□□□□22□□□□□□□□□□□□□□□□□□

60 40 22





[www.nonwovenproductsulipper.com](http://www.nonwovenproductsulipper.com)

[www.guidenonwoven.com](http://www.guidenonwoven.com)



60 40 22

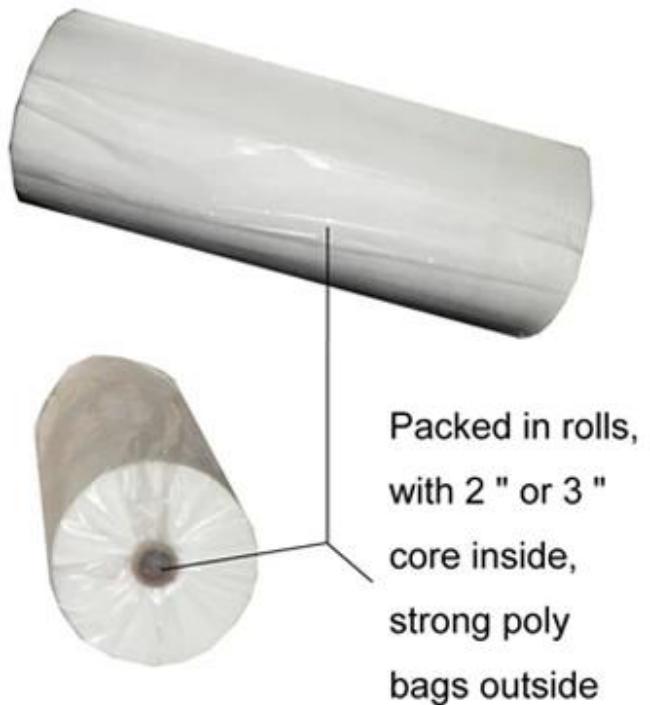

transporting the goods  
to the port



loaded in container

60mm diameter 40mm thickness 22mm core diameter

Q1	A1
Q2 MOQ	A2 1
Q3	A3
Q4	A4
Q5	A5
Q6	A6

Q7	A7 OEM
Q8	A8 24