


□□□□ G01045□□□□□□□□□□SMS□□□


□□	G01045□□□□□□□□□□SMS□□□
□□□	□□□□□□
□□□□	□□□□□□
□□□□	□□
□□□□□□□	□□□□
□	□□□□□□□□□□□□□□
□□□	≤ 3200 □□□□□□□□□□□□□□□□□□□□
□□	□□□□□□□□25-110gsm□
□□	□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□	□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□ G01045□□□□□□□□□□SMS□□□

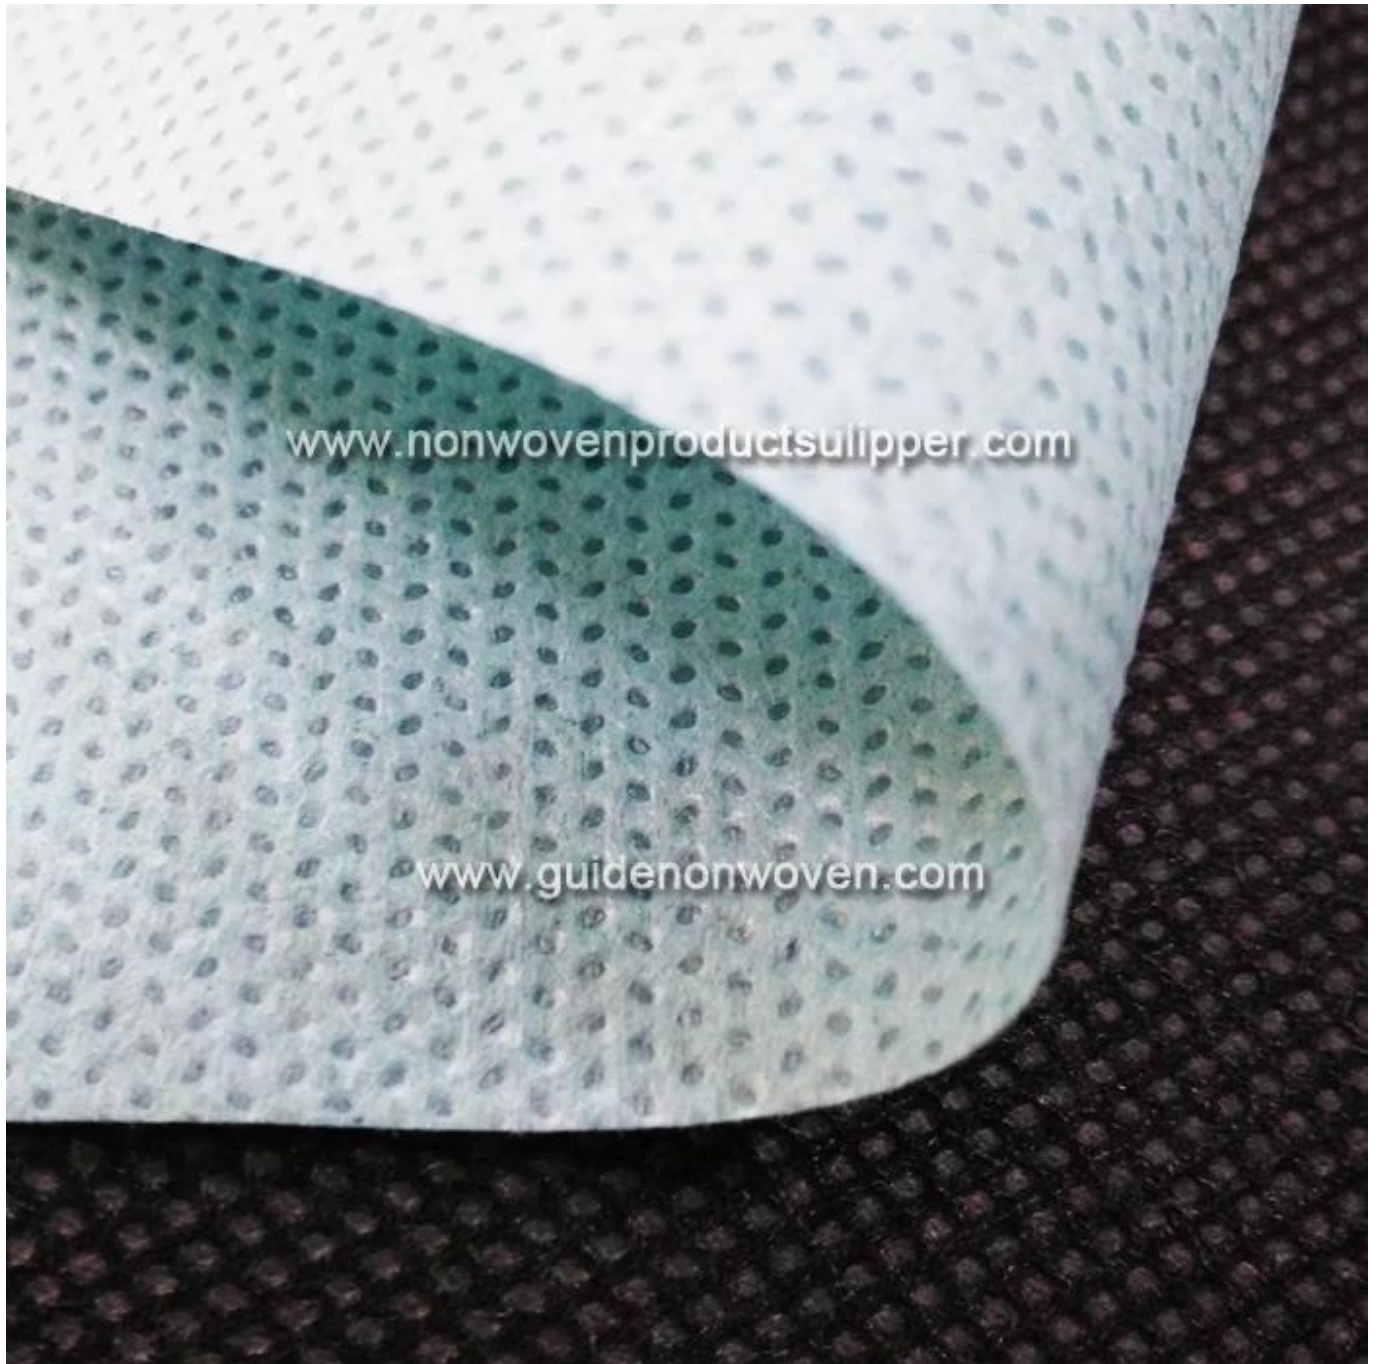

www.nonwovenproductsulipper.com

www.guidenonwoven.com



www.nonwovenproductsulipper.com

www.guidenonwoven.com



www.nonwovenproductsulipper.com

www.guidenonwoven.com

G01045SMS



Packed in rolls,
with 2 " or 3 "
core inside,
strong poly
bags outside



transporting the goods
to the port



loaded in container



G01045 SMS FAQ

Q1	A1
Q2 MOQ	A2 1 1
Q3	A3
Q4	A4
Q5	A5
Q6	A6 2 4

Q7	A7 OEM
Q8	A8 24