

LY225 gsmSMS


	LY225 gsmSMS
	+SMS
	LY2
	3.2M
	- - - -
	/

	GSM	24.06	ASTM D3776
MD	N /5	59.57	ASTM D5035-95
CD	N /5	26.77	ASTM D5035-95
MD		81.77	ASTM D5035-95
CD		70.37	ASTM D5035-95
	2Ø	31	IST 80.6
	G	0.91	AATCC 42

LY225 gsmSMS

www.nonwovensproductsulipper.com

www.guidenonwoven.com

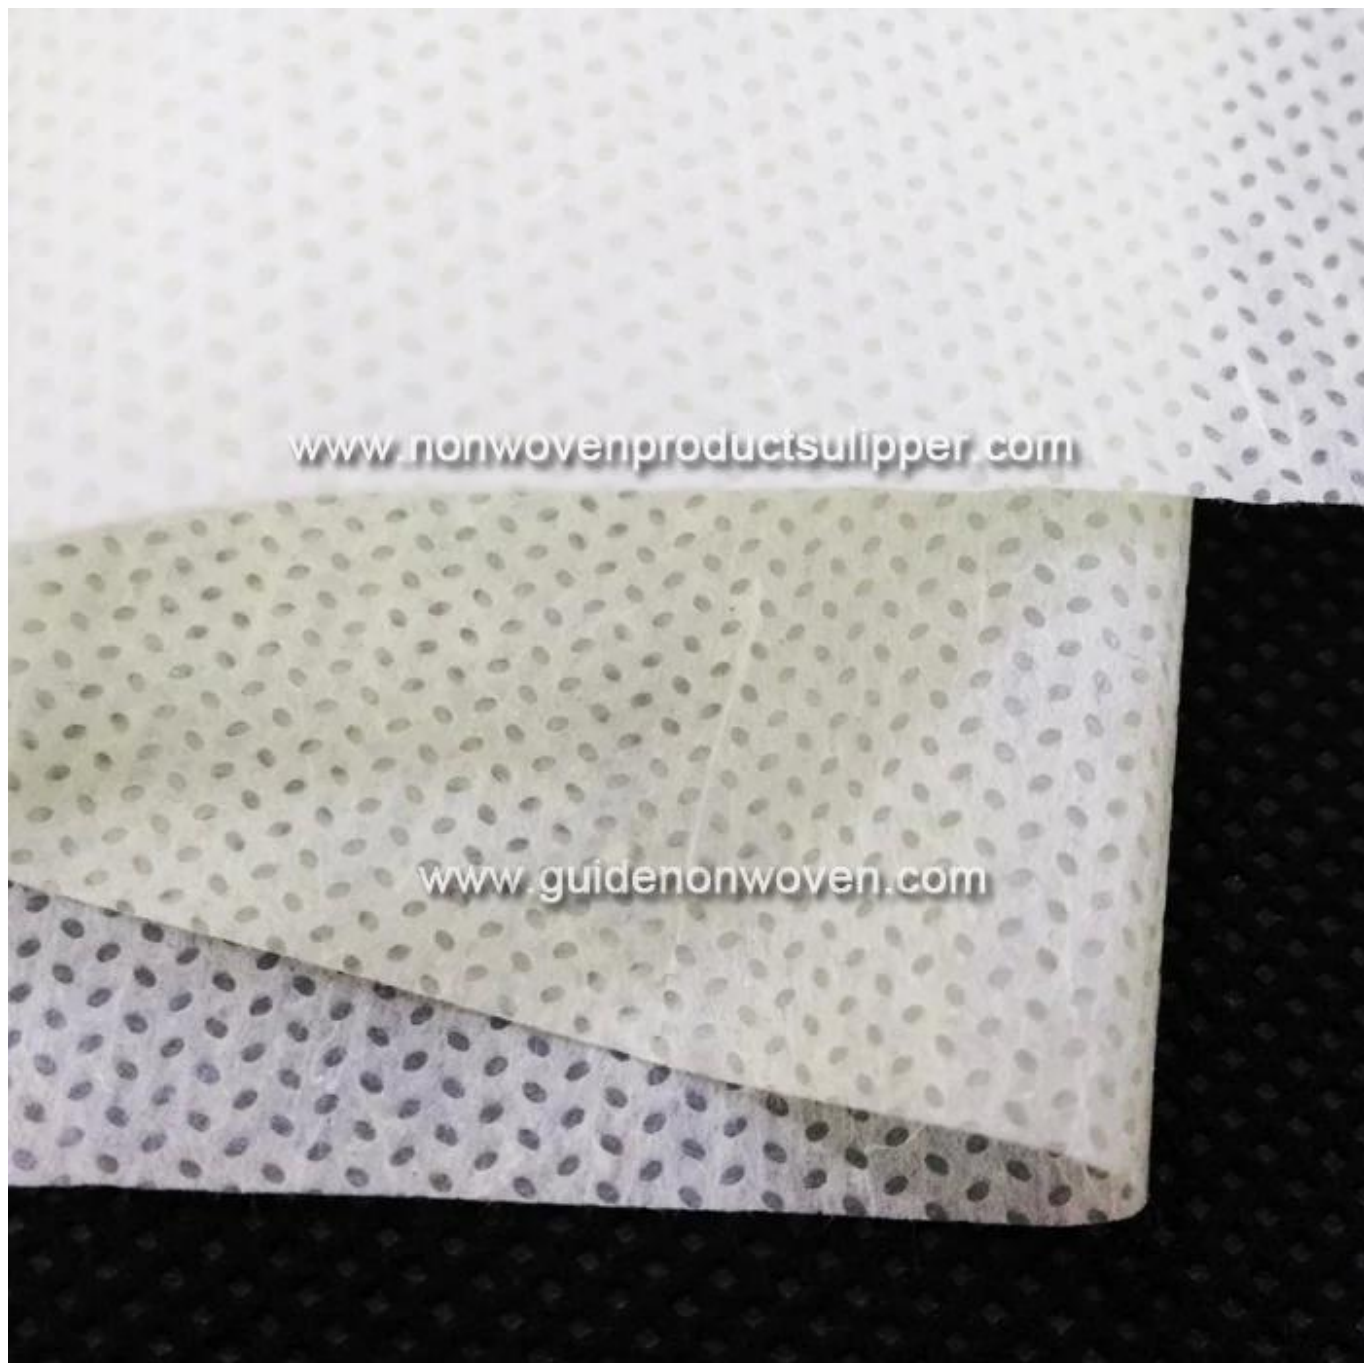

LY2 25 gsm SMS



Packed in rolls,
with 2 " or 3 "
core inside,
strong poly
bags outside



transporting the goods
to the port



loaded in container

LY2 25 gsm SMS

	A1
	A2
	A3
	A4
Q5	A5
Q6	A6
Q7	A7
Q8	A8

