

000000GTHY-WH1-SMS 45 gsm000SMS000000000000


00	00GTHY-WH1- SMS 45 gsm000SMS000 0000000000
000	000
00000	00+00+00.0SMS0
00	0000
0000	000
00	WH1
0000	3.2M00000000
00	- 000 - 00000 - 000000000000000000 - 00000000000000
00	00/00 00000000000000

00	00	00	00
00	GSM	45.04	ASTM D3776
MD0000	N /500	109.43	ASTM D5035-95
CD0000	N /500	54.43	ASTM D5035-95
MD000	0	113.07	ASTM D5035-95
CD000	0	85.83	ASTM D5035-95
000	00H.2Ø	53	IST 80.6
000	L /0 ² ·S	195.99	ASTM D737-75

000000GTHY-WH1-SMS 45 gsm000SMS000000000000



www.nonwovenproductsulipper.com

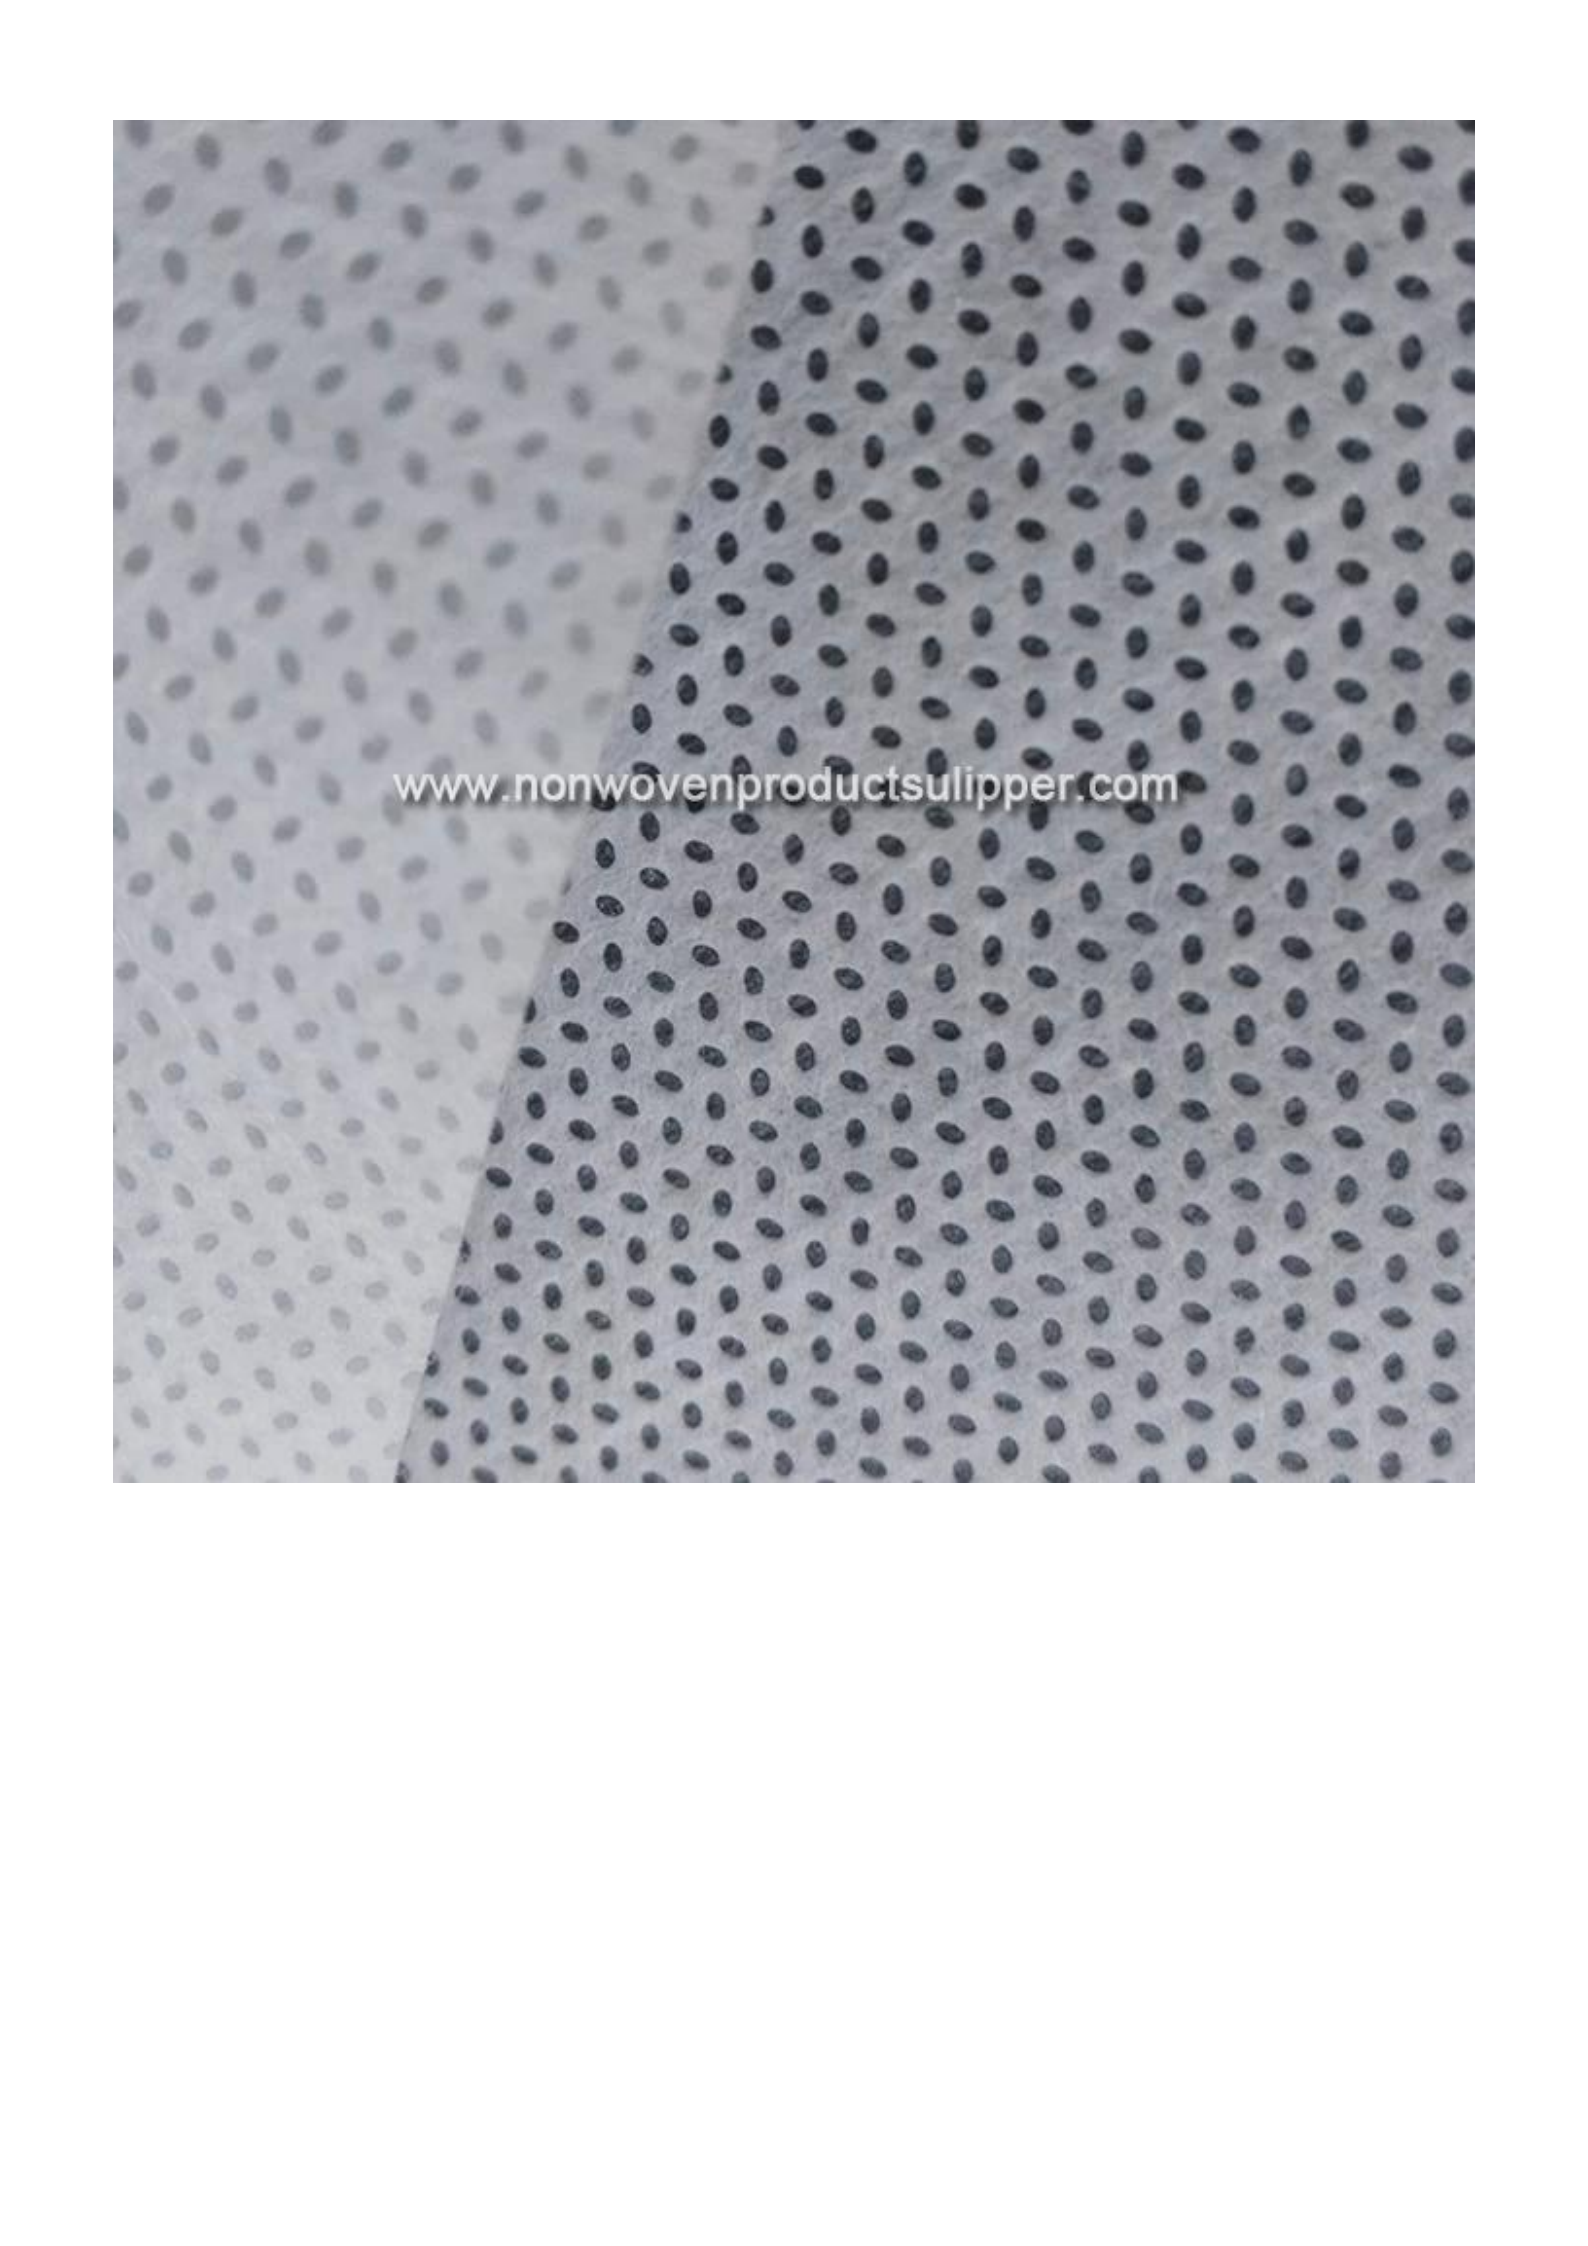

www.nonwovenproductsulipper.com



□□□□□□□□GTHY-WH1-SMS 45 gsm□□□SMS□□□□□□□□□□□□



Packed in rolls,
with 2 " or 3 "
core inside,
strong poly
bags outside



transporting the goods
to the port



loaded in container

GTHY-WH1-SMS 45 gsmSMS

Q	A
Q1 	A1
Q2 	A2
Q3 	A3
Q4 	A4
Q5 	A5
Q6 	A6
Q7 	A7 OEM

Q8	A8
----	----